



# Installation Instructions

## For Part Numbers:

720-182 Airaid Synthaflow Oiled Media Filter

721-182 Airaid Synthamax Dry Media Filter - Red

722-182 Airaid Synthamax Dry Media Filter - Black

723-182 Airaid Synthamax Dry Media Filter - Blue

Thank you for purchasing the Airaid Premium Filter. Please read the installation instructions carefully before proceeding with the installation. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure **MUST** be followed to ensure a proper fit and seal.

**If you need any assistance please call 1-800-498-6951 to speak with a representative in our Customer Service Center before returning the product.**

## INSTALLATION:

1. Remove OE filter from air box
2. Clean sealing surface of airbox from any dirt and debris. Fig. 1
3. Install Airaid filter into air box.

**NOTE: The tab on the filter top will be facing up, towards air box lid.** Fig. 2

4. With filter sitting correctly in air box, you will need to push the top of the filter towards the sealing surface of the air box and down into the tabs in the bottom of the air box.

**NOTE: Moderate amount of pressure will be needed to push filter down into place.** Fig. 3 and 4

5. Reinstall air box lid.

**CLEANING:** For your Synthaflow OILED filter we suggest using the AIRAID filter Tune-Up Kit. P/N 790-551 Aerosol Spray, P/N 790-550 Squeeze Spray. Synthamax Air Filters, do not require oil. We suggest using the AIRAID Cleaning Kit for Non-Oiled Dry filters P/N 790-558

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**

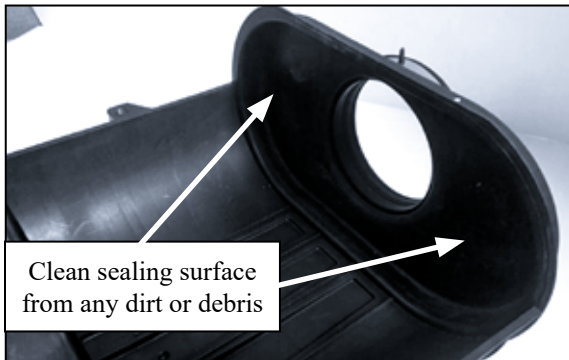


Fig.1



Fig.2



Fig.3

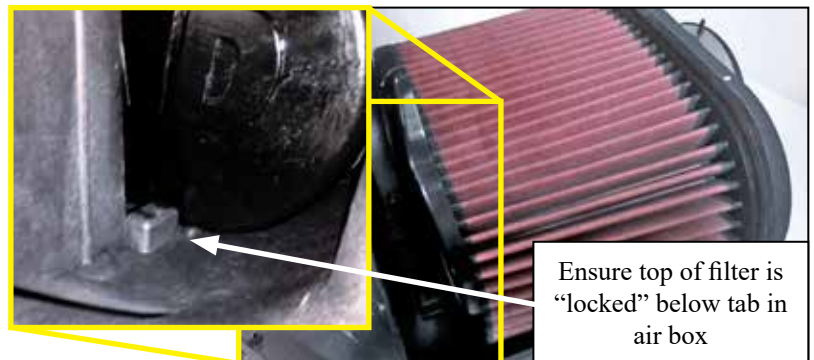


Fig.4