



INSTALLATION INSTRUCTIONS

Part Number: VF1001

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

* FREE K&N® decal To register your warranty, please see us online at knfilters.com/register. FREE K&N® decal *

K&N® Cabin Air Filters replace your vehicle's stock cabin filter with a reusable design that cleans and freshens incoming air. They are electrostatically charged to grab and hold dust particles. K&N® cabin air filters help control odors while they help capture most mold, mildew, fungus, spores, bacteria and germs. When they get dirty they can be cleaned and reused and best of all, they come with a 10 year/Million mile limited warranty.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

When applicable, refer to owner's manual for manufacturers installation/removal instructions. The following are helpful steps when replacing/servicing cabin air filter with K&N® cabin air filter.

1. Open glove box.
2. Apply pressure to the sides of the glove box pushing into the center. This will allow the glove box to hang free from the stops and you will have access to the cabin filter housing. Fig. 1
3. Remove fastener that holds cabin air filter lid to cabin filter housing. Fig 2
4. There are 2 filters located in the cabin filter housing. Remove the first filter, then slide the second filter to the left and remove from cabin filter housing. Fig. 3
5. With the dirty cabin filters removed, clean any debris that might be present in the cabin filter housing.
6. Install the first K&N® Cabin Filter into the housing and slide it to the right. With the first cabin filter installed, insert the second cabin filter into the housing. Fig. 4 & Fig. 5
7. Reverse steps 1-4 to complete cabin filter installation. With the cabin filter installed, clean an area on the cowl and apply the K&N® Stop Decal. The decal will help notify others that this is a re-usable cabin filter.

NOTE: For removal of K&N® cabin filter for service, there are pull/pry features built into the K&N® cabin filter. These areas can be used with a pair of pliers or a standard screw driver to pry the filter from the housing. Use caution when removing, there is no need for excessive pressure to be applied. Fig. 6 & Fig 7.



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5

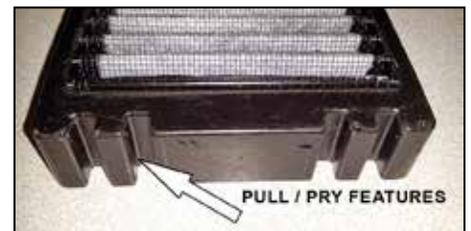


Fig. 6

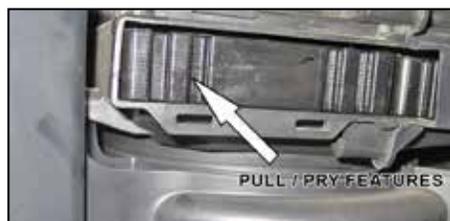


Fig. 7

Please visit our website knfilters.com for a complete listing of other K&N® products for your vehicle, such as oil filters, air filters, and intake kits. We recommend refreshing your K&N® Cabin Air Filter every 12 months, or 12,000 miles. Use K&N® Refresher kit pt.# 99-6000 which includes the easy to follow instructions.