



INSTALLATION INSTRUCTIONS

PART NUMBER: 33-2326

This filter fits: See catalog for current applications

* **FREE K&N® decal** To register your warranty, please see us online at knfilters.com/register. **FREE K&N® decal ***
Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modification will be required. However the following procedures **MUST** be followed to ensure the proper fit and seal of the K&N® air filter.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

INSTALLATION:

1. Unfasten the clips securing the airbox lid to the airbox base, lift up the lid and remove the OE air filter.

NOTE: Some models may have a fascia that needs to be removed prior to performing step 1.

2. Clean the inside of the airbox with a damp cloth removing any loose debris.
3. Install the K&N® air filter into the airbox base. (Fig. 1)

NOTE: If the airbox lid becomes detached from the airbox base, reattach the airbox lid to the airbox base before proceeding to step 4. Ensure the airbox lid hinges engage the inserts of the airbox base at the rear.

4. Lift the K&N® air filter up into the airbox lid, then holding the air filter and lid in place, lower the airbox lid onto the airbox base. (Fig. 2 and Fig. 3)
5. Secure the airbox lid to the airbox base by securing the airbox lid clamps. (Fig. 3)

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1



Fig. 2

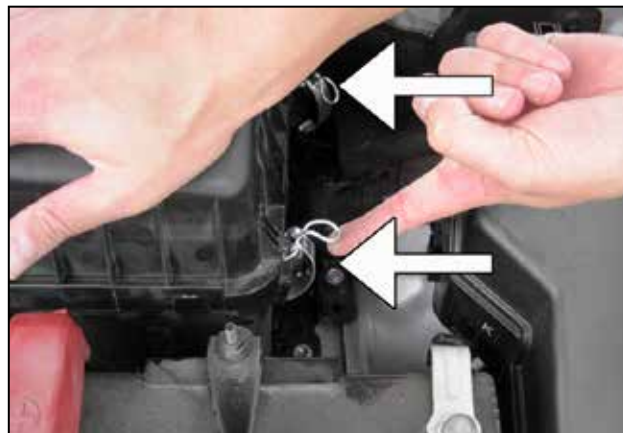


Fig. 3